





With our extensive experience in designing and manufacturing of long reach boom, you can now maximize your ROI (Return On Investment) on your existing fleet of excavators. Hundreds of customers have realized the value of long reach attachment where standard boom failed to get the necessary job done effectively. Our long reach boom can help you to achieve more than 50% digging depth and forward reach over a standard boom, saving you valuable cost and time, and maximizing your bottom line.

Structural grade tensile steel is used in our boom and stick construction, and we do design it with various grades of tensile steel depending on the nature of the application. We supply long reach packages for various excavator models ranging from 10 to 200 metric ton.

Many are amazed to find that a small island country of Singapore has well over 10 years history of long reach application in the construction industry. Long reach excavators are such a common sight in almost all construction sites across Singapore. The significance is not because of its popularity, but the wealth of knowledge and cumulative experience gained over the decade in designing a reliable product at the given price point. The many years of practical experience in fabrication and field testing have provided us with a solid foundation in helping our customers to customized long reach solutions for their application needs.

Product design are accomplished by utilizing latest CAD software, simulated via advance Finite Element Analysis (FEA) tools, ensuring optimum design integrity.

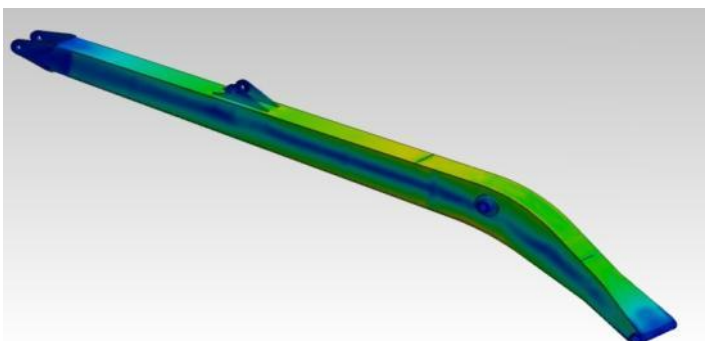

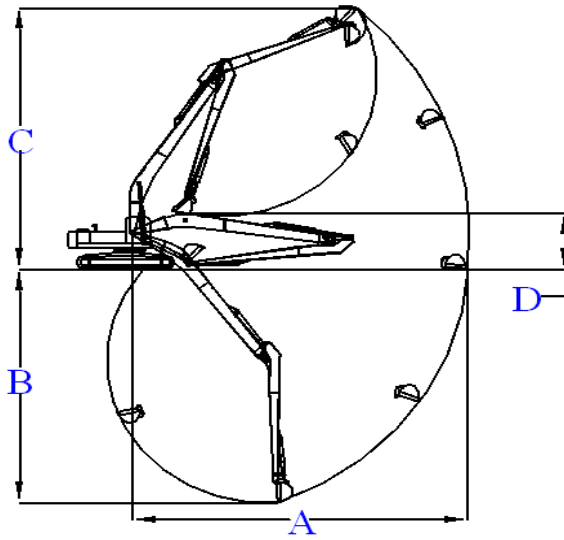

Each long reach package come standard with the following items:

- 1x boom
- 1x stick/dipper arm
- 1x bucket
- 1x bucket cylinder/ram
- 1x boom yoke pin
- 1 set of Hydraulic pressure hose
- 1 set of linkage
- 2x bucket pin
- 2x bucket link pin
- Full set of hydraulic lines

Excavator Operating Weight	Length		A Max. Reach		B Max. Digging Depth		C Max. Height		D Boom Height		Approximate Bucket Capacity	
	m	ft	m	ft	m	ft	m	ft	m	ft	m ³	Yard ³
20-22 ton (44,000-48,400 lb)	15.5	50'	15.50	50' 2"	11.46	37' 7"	13.78	45' 3"	2.50	8' 3"	0.50	0.65
	16.5	53'	16.50	53' 2"	12.16	39' 11"	14.40	47' 3"	2.50	8' 3"	0.40	0.52
23-25 ton (50,600-55,000 lb)	16.5	53'	16.50	53' 2"	12.01	39' 5"	14.70	48' 3"	2.70	8' 11"	0.50	0.65
	17.0	56'	17.00	56' 0"	12.85	42' 2"	15.60	51' 2"	2.70	8' 11"	0.40	0.52
28-30 ton (61,600-66,000 lb)	18.5	60'	18.50	60' 5"	14.00	45' 11"	16.20	53' 2"	2.90	9' 7"	0.60	0.78
	20.0	65'	20.00	65' 1"	15.30	50' 2"	17.40	57' 1"	2.90	9' 7"	0.50	0.65
33-35 ton (72,600-77,000 lb)	20.0	65'	20.00	65' 1"	16.20	53' 1"	16.70	54' 9"	3.40	11' 0"	0.70	0.91
	21.0	68'	21.00	68' 3"	17.00	55' 9"	17.48	57' 4"	3.40	11' 0"	0.60	0.78
40-45 ton (88,000-99,000 lb)	21.0	68'	21.00	68' 3"	15.30	50' 2"	15.58	49' 3"	3.70	12' 2"	0.85	1.11
	22.0	72'	22.00	72' 2"	16.25	53' 4"	15.92	52' 3"	3.70	12' 2"	0.80	1.04
50-55 ton (110,000-121,000 lb)	22.0	75'	22.00	72' 2"	16.25	53' 4"	15.92	52' 3"	3.70	11' 8"	1.00	1.3
	23.0	75'	23.00	75' 5"	17.80	58' 4"	17.50	57' 5"	4.10	13' 6"	1.20	1.56
70-75 ton (154,000-165,000 lb)	24.0	79'	24.00	78' 8"	19.00	62' 4"	19.00	62' 4"	4.60	15' 1"	1.40	1.82
	25.0	82'	25.00	82' 0"	19.20	62' 11"	19.20	62' 11"	4.70	15' 5"	1.50	1.95
100-110 ton (220,000-242,000 lb)	27.0	88'	27.00	88' 7"	20.00	65' 7"	19.00	62' 4"	5.00	16' 5"	1.60	2.08
	28.0	92'	28.00	91' 9"	21.00	68' 10"	20.00	65' 7"	5.00	16' 5"	1.40	1.82
120-130 ton (264,000-286,000 lb)	28.0	92'	28.00	91' 9"	21.00	68' 10"	20.00	65' 7"	5.50	18' 1"	1.60	2.08
	29.0	95'	29.00	95' 1"	22.00	72' 2"	20.50	67' 3"	5.50	18' 1"	1.40	1.82

* The above specifications are for reference only, actual working range may vary from machine models.

** For the benefit of continuous product improvement, specifications are subject to change without prior notice.

A simple reconfiguration of mounting the hydraulic cylinder/ram at the underside of the stick/dipper arm would transform a typical long reach attachment to a simple high reach boom for demolition application. A simpler and cost down version of a typical 3-piece demolition boom. A 2-piece demolition boom



is also less taxing to control and operate, and operator can get the necessary job accomplished without going through major re-training, saving valuable time and cost. It is also an excellent solution for slop forming where standard boom fall short in this respect.



Long reach excavators work in the harshest conditions you can ever imagine. Our ultimate goal is to extend the dependable service life of the product. All long reach front are shot blasted to ensure that the surface is thoroughly clean and free from contaminants and rust. In addition, this process presents the

steel with a surface texture that provides excellent adhesion of prime coat of paint.

Every long reach package is professionally packed on metal rack for ease of transportation, hauling, handling and maximizing storage space.



The finished product is deemed incomplete without the final QC inspection. Every item is thoroughly checked prior to packaging. The subsequent final round of post-packaging inspection is carried out before it is released for shipment.



Contact Us

EIK Group of Companies

EIK Engineering Pte. Ltd

Blk 135, Jurong East Gateway Road, #03-315,
Singapore 600135

Tel: +65-9815 9685, Fax: +65-6877 0013

Email 1: sales@eikengineering.com

Email 2: info@eikengineering.com

EIK Engineering Sdn. Bhd.

Lot 16, Jalan Kemahiran SILC, Taman Perindustrian
Nusajaya, 79200 Bandar Nusajaya, Johor, Malaysia.

Tel: +607-531 9922, Fax: +607-531 9919

Email 1: sales@eikengineering.com.my

Email 2: info@eikengineering.com

Eik Lam Engineering Sdn Bhd

24, Jalan Mega 1/4, Taman Perindustrian Nusa
Cemerlang, 79200, Nusajaya, Johor, Malaysia.

Tel: +607-554 2700 , Fax: +607-554 1785

Email: eiklamsb@streamyx.com

Sales Offices

Singapore**EIK Engineering Pte. Ltd**

Blk 135, Jurong East Gateway Road, #03-315,
Singapore 600135

Tel: +65-9815 9685, Fax: +65-6877 0013

Email 1: sales@eikengineering.com

Email 2: info@eikengineering.com

Malaysia**EIK West Malaysia**

89B, 2nd Floor, Lorong Mamanda 1, Ampang Point,
Batun 4 ½, Taman Ampang Point, Ampnag, 68000,
Selangor.

Tel: +603-4253 4689, Fax: +603-4253 4688

E-Mail: sales@eikengineering.com.my

Japan**EIK Japan**

No. 7-10, Kotobashi 2-Chome, Sumida-Ku,
Tokyo 130-0022, Japan

Tel: +81-3-6905-8885, Fax: +81-3-6905-8883

E-Mail: japan_sales@eikengineering.com

Vietnam**EIK Vietnam**

A10, Alley 217 La Thanh Street, Dong Da Dist, Hanoi,
Vietnam

Tel: +84-4-35190374, Fax: +84-4-35190390

E-Mail: vietnam_sales@eikengineering.com

Brunei**EIK Brunei**

No. 3, Spg 633, Beribi, Jln Gadong, BE 1118,
Bandar, Seri Begawan, Negara Brunei Darussalam

Tel: +673-899-3806

E-Mail: alanchong@eikengineering.com.my

Indonesia**EIK Indonesia**

Jl. Husein Sastra Negara No. 199, Jurumudi
Cengkareng, Jakarta Barat

Tel: +62-21-71118641, Fax: +62-21-54370677

E-Mail: sales@eika.co.id